

WOODS BATWING® CUTTERS



We not only build the toughest Batwing®,
we build the only Batwing®

WOODS

Table of Contents

Compact/utility Series 4
 BW12
 BW15

15-foot Standard-duty Series 7
 BW180X
 BW126X (10.5 ft. Single-wing Cutter)

15-foot Heavy-duty Series 4
 BW180XHD
 BW126XHD (10.5 ft. Single-wing Cutter)

15-foot Extreme-duty 6
 BW1800X
 BW1260X (10.5 ft. Single-wing Cutter)

20-foot Standard-duty 8
 BW240

20-foot Heavy-duty 9
 BW240HD

20-foot Extreme-duty Series 9
 BW2400X
 BW1620X (13.5 ft. Single-wing Cutter)

Specifications Chart 10

Woods care
 GENUINE PARTS

Maintain the quality and performance of your Woods equipment with WoodsCare genuine replacement parts, paint, and lubricants. Available from your authorized Woods dealer.



Legend

Woods products are top-quality machines, tested to industry standards, proven in the field, and consistently constructed to American Welding Society specifications.

Compact/utility Tractor

Designed and manufactured for use on tractors with lower horsepower

Standard-duty

Designed and manufactured for typical usage and basic applications.

Medium-duty

Designed and manufactured for harsher usage and more robust applications.

Heavy-duty

Designed and manufactured for extended usage and the most demanding applications.

Extreme-duty

Designed and manufactured for severe usage and the most intense applications.



Woods products are proudly made in the USA. As part of a global economy, we work with business partners around the world and export our equipment to international markets. Since 1946, we've been manufacturing in Oregon, Illinois, and supporting the growth of American jobs.

Find a Woods Dealer

Woods equipment is distributed through a network of authorized dealers. To find your nearest store visit us at woodsequipment.com or call 800-319-6637.

Proven Durability

We not only build the toughest Batwing®, we build the only Batwing®! But, don't just choose us for our name, choose us for the hours of testing in extreme conditions, the rugged sub-structure, and the industry-leading welding and paint standards. Choose Batwing® for the sheer ability to tame the most unruly waterways, pastures, and roadsides.

Unbeatable Performance


Higher torque capacities, deeper decks, and our innovative wing design ensure you'll mow more material in less time. Woods Batwing® cutters set the standards for cut quality, distribution, and ease of use, whether you're cutting brush or shredding stalks.



WOODS

Batwing® Cutters

12-Foot Batwing® Cutter

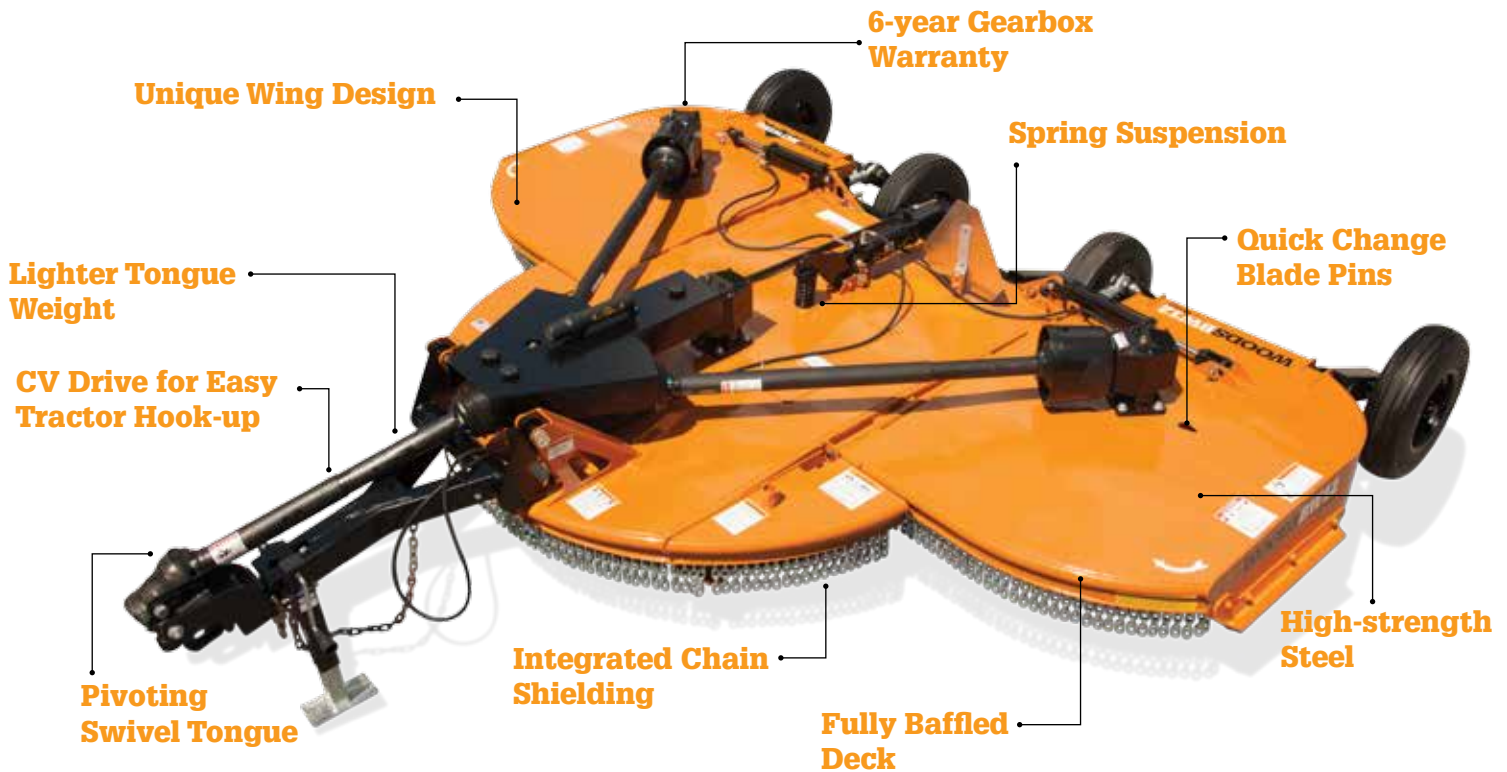

12-Foot Compact/utility Series

Requiring a minimum of 35 PTO HP, the BW12 gives you Woods quality and performance in a sleek, round-front design and our industry-leading sloped deck.

Tractor PTO Minimum: 35hp

Model

BW12 Compact/utility Tractor-duty 12 ft. Dual-wing Cutter

- Total weight 2,450 lbs with 750 lb tongue weight, ideal for use on lower horsepower compact and utility tractors
- Twelve-gauge, high-strength steel and smooth, sloped deck provide durability for long life
- Easy hook-up reduces preparation time and frustration
- Fully baffled deck, ensures better distribution of cut material, and the performance you expect
- Six-year gearbox warranty including seals, for confidence in your purchase decision
- Standard chain shielding, for added safety and peace of mind





Wheel Options

Laminated solid tires, used aircraft tires or foam-filled aircraft tires

Gearbox Warranty

Gearboxes carry a six-year limited warranty

15-Foot Compact/utility Series

Our innovative lightweight design makes it possible to use a smaller, more fuel-efficient tractor, saving money every time you mow. With tongue weight under 900 lbs, the BW15 is ideal for use on compact and utility tractors.

Tractor range: 40–90 hp

Model

BW15 Compact/utility Tractor-duty 15 ft. Dual-wing Cutter

- Main driveline: Cat 4 CV
- Full-length, 24-inch replaceable side skids feature a large wear surface for greater durability and a formed angle to prevent scalping
- Safety lock easily secures deck for safe, simple transporting
- Deep, 10-inch side frame and sloped deck has greater material capacity for efficient productive cutting
- Wheel options — laminated solid tires, used aircraft tires or foam-filled aircraft tires
- Dual wheels available on wings and center for extra flotation

***NOTE:** Woods Batwing® models pass all applicable safety standards for thrown object and blade contact without chain shielding. However, if these units will be used in areas where the possibility of thrown objects could be hazardous to persons or property, it is strongly recommended that optional chain shielding be used for extra protection.

WOODS

Batwing® Cutters

15-Foot Batwing® Cutters



Large Gearboxes
Large gearboxes with a
6-year limited warranty

BW180X
shown with standard
chain shielding*

15-Foot Standard-duty Series

Tractor ranges: 45–160 hp

Models

BW180X 15 ft. Dual-wing Cutter
BW126X 10.5 ft. Single-wing Cutter

- Main driveline: Cat 6 CV or Cat 5 heavy 3 joint
- Cuts brush up to 2.5 inches in diameter
- Wings fold up independently to a narrow 96-inch transport width and lock securely for quick and easy transport
- Thirteen-inch side frame depth increases cut material capacity and earns the distinction of the deepest deck in the industry
- Dual wheels available on wings and center for extra flotation
- Six-year gearbox limited warranty
- Ten-year deck rust-through warranty
- Fully baffled deck for even distribution

15-Foot Heavy-duty Series

Tractor ranges: 55–235 hp

Models

BW180XHD 15 ft. Dual-wing Cutter

BW126XHD 10.5 ft. Single-wing Cutter

- Main driveline: Cat 6 CV or Cat 5 heavy 3 joint
- Swivel clevis hitch
- Cuts brush up to 3.5 inches in diameter
- Thirteen-inch side frame depth increases cut material capacity and earns the distinction of the deepest deck in the industry
- Optional shredding kit available for shredding crop residue
- Dual-wheels available on wings and center for extra flotation
- Full-length, 1-inch wing hinge pin
- Six-year gearbox limited warranty
- Ten-year deck rust-through warranty
- Fully baffled deck for even distribution



BW180XHD
shown with standard
chain shielding*

***NOTE:** Woods Batwing® models pass all applicable safety standards for thrown object and blade contact without chain shielding. However, if these units will be used in areas where the possibility of thrown objects could be hazardous to persons or property, it is strongly recommended that optional chain shielding be used for extra protection.

Batwing® Cutters

15-Foot Extreme-duty Series

Tractor ranges: 65–250 hp

Models

BW1800X 15 ft. Dual-wing Cutter

- Main driveline: Cat 6 CV or Cat 5 heavy 3 joint
- Thirteen-inch side frame depth increases cut material capacity and earns the distinction of the deepest deck in the industry
- Optional shredding kit available for shredding crop residue
- Massive, heavy-duty gearboxes have blade tip speeds of 16,000 fpm, delivering more cutting power and performance
- Optional blade ring
- Heavy-duty skid shoes with an “approachable” leading edge reduce sod damage when turning
- Exclusive Quick Change pins enable speedy blade changes in the field

Self-Leveling Hitch

Self-leveling, swivel clevis hitch is standard equipment, reducing stresses to the BW1800X and your tractor when operating on uneven terrain

Walking Tandem Axle

Optional walking tandem dual wheel spring axles are rugged and durable



BW1800X
shown with
standard chain
shielding*

Bolt-on Skid Shoes

Bolt-on skid shoes with an approachable leading edge are replaceable and reduce sod damage when turning

10.5-Foot Extreme-duty Series

Tractor ranges: 65–250 hp

Model

BW1260X 10.5 ft. Single-wing Cutter

- Main driveline: Cat 6 CV or Cat 5 heavy 3 joint
- Thirteen-inch side frame depth increases cut material capacity and earns the distinction of the deepest deck in the industry
- Cat 5 wing drives
- Massive, heavy-duty gearboxes have blade tip speeds of 16,000 fpm, delivering more cutting power and performance
- Optional blade ring
- Six-year gearbox limited warranty
- Ten-year deck rust-through warranty
- Fully baffled deck for even distribution



***NOTE:** Woods Batwing® models pass all applicable safety standards for thrown object and blade contact without chain shielding. However, if these units will be used in areas where the possibility of thrown objects could be hazardous to persons or property, it is strongly recommended that optional chain shielding be used for extra protection.

WOODS

Batwing® Cutters

20-Foot Batwing® Cutters



BW240
shown with standard
chain shielding*

20-Foot Standard-duty

Tractor ranges: 70–200 hp

Model

BW240 20-foot Folding-wing Rotary Cutter

- Main driveline: Cat 6 CV or Cat 5 heavy 3 joint
- Cuts brush up to 2 inches in diameter
- Side frame depth of 13.25 inches — the deepest in the industry
- Six-year gearbox limited warranty
- Ten-year deck rust-through warranty
- Walking tandem axle available
- Fully baffled deck for even distribution

Quick Change Blade System



Woods' exclusive Quick Change blade system allows for easy changing of blades and is a feature on all Batwing® rotary cutters.


20-Foot Heavy-duty

Tractor ranges: 70–300 hp

Model

BW240HD 20-foot Folding-wing Rotary Cutter

- Main driveline: Cat 6 CV or Cat 5 heavy 3 joint
- Cuts brush up to 3 inches in diameter
- Side frame depth of 13.25 inches — the deepest in the industry
- Six-year gearbox limited warranty
- Ten-year deck rust-through warranty
- Fully baffled deck for even distribution
- Self-leveling, swivel clevis hitch
- Optional shredding kit

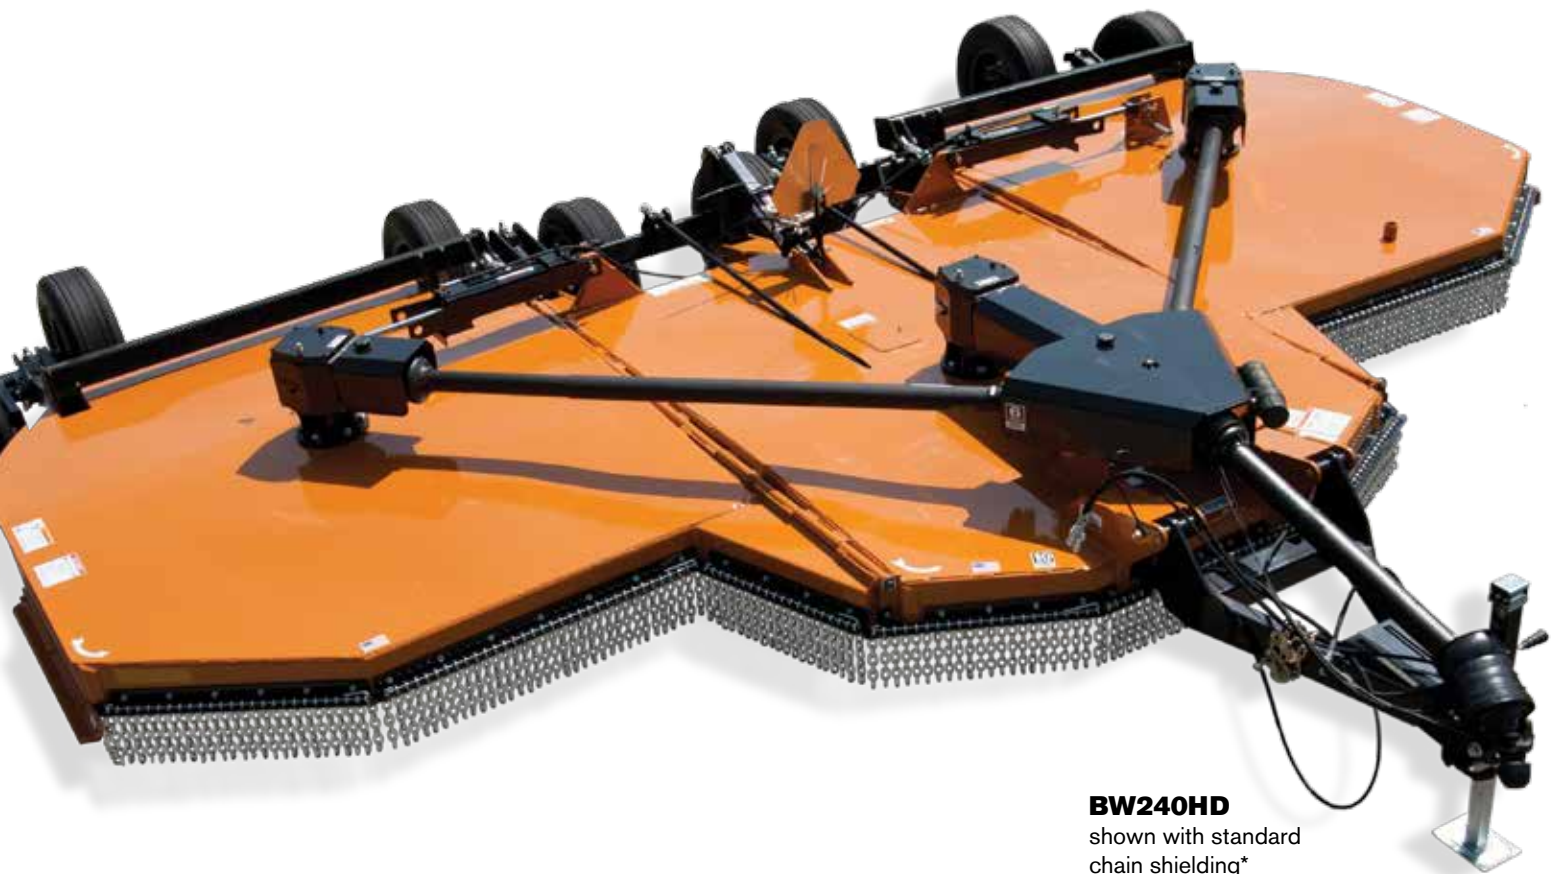

BW240HD

shown with standard chain shielding*

***NOTE:** Woods Batwing® models pass all applicable safety standards for thrown object and blade contact without chain shielding. However, if these units will be used in areas where the possibility of thrown objects could be hazardous to persons or property, it is strongly recommended that optional chain shielding be used for extra protection.

20-Foot Extreme-duty Series


Tractor ranges: 70–300 hp

Models

BW2400X 20-foot Folding-wing Rotary Cutter

BW1620X 13.5-foot Single Folding-wing Rotary Cutter

- Self-leveling, swivel clevis hitch
- Main driveline: Cat 6 CV or Cat 5 heavy 3 joint and Cat 5 wing drive
- Cuts brush up to 4 inches in diameter
- Extra-heavy double-deck
- Side frame depth of 12.5 inches
- Choice of right or left wing on the BW1620X
- Six-year gearbox limited warranty
- Fully baffled deck for even distribution
- Optional dual tires available for wings
- Optional shredding kit and optional blade ring

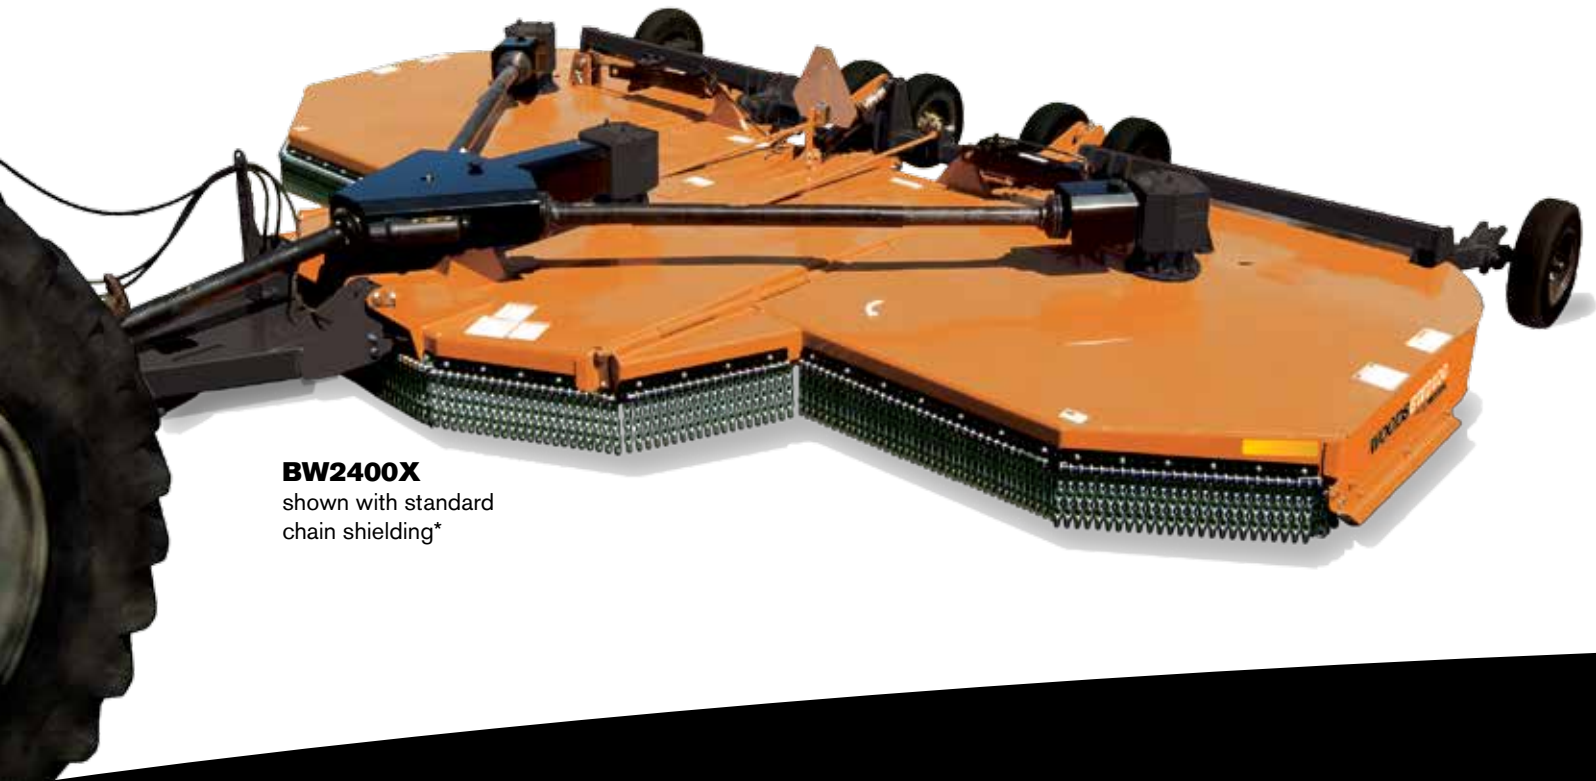

BW2400X
shown with standard
chain shielding*

Mowing Tips

A tractor and a mower attachment are not the only important parts of maintaining grass on your property. Below are valuable tips to foster healthy grass growth and safety considerations, as well as suggestions on how to be more productive and extend the life of your equipment.

Tip #1

Extremely tall grass should be mowed twice. Raise the mower and cut half the desired height. Cut the second time at the desired height and at 90 degrees to the first pass.

Tip #2

Remember sharp blades produce cleaner cuts and use less power.

Tip #3

Before mowing, analyze the area to determine the best mowing procedure. Consider the height and type of grass and the terrain type (hilly, level or rough).

Tip #4

Plan your mowing patterns to travel straightforward whenever possible. The less turning or backing up you do will reduce your mowing time.

Tip #5

Before beginning to mow, walk the area first and remove any stones or debris, which may be hidden in the grass.

Tip #6

When mowing along roadsides, always discharge the material away from the road.

***NOTE:** Woods Batwing® models pass all applicable safety standards for thrown object and blade contact without chain shielding. However, if these units will be used in areas where the possibility of thrown objects could be hazardous to persons or property, it is strongly recommended that optional chain shielding be used for extra protection.

Batwing® Cutters

Specifications	BW12	BW15	BW180X / BW126X	BW180XHD / BW126XHD
Tractor PTO HP Range	35 hp minimum	40–90 hp	45–160 hp	55–235 hp
Side Frame Depth	11"	10"	13"	
Cutting Swath	144"	180"	180" / 126"	
Cutting Height	2"–12"		2"–15"	
Cutting Capacity Diameter	1-1.5"	1.5"	2.5"	3.5"
Hitch	swivel clevis	clevis	clevis	swivel clevis; optional pintel ring
Transport Width	96"	96"	96" / 93"	
Overall Width	154"	190"	190" / 136"	
Overall Length	165"	170"	205" / 205"	
Deck Type	smooth, sloped			
Deck Thickness	.120"		.135"	
Side Frame Thickness	.18"		.25"	
Hinge Rod Diameter	1" full length			
Weight	2,450 lbs	3,120 lbs	4,100 / 3,950 lbs	4,730 / 4,370 lbs
Tongue Weight	750 lbs	872 lbs	1,310 / 1,380 lbs	1,660 / 1,530 lbs
Main Driveline Rating	Cat 4	Cat 4 CV	Cat 6 CV or Cat 5 heavy 3 joint	
Output Shaft Diameter	1.5"	2"		2.38"
Splitter/Spindle Gearbox HP	160 / 90 hp	160 / 90 hp	160 / 120 hp	235 / 205 hp
Blade Type	.5" x 4" blade bolt, hi-lift	.5" x 4" blade bolt, hi-lift	.5" x 4" quick change blade pins, hi-lift, flat or shredder	
Blade Overlap	6"			
Blade Tip Speed 540 RPM	14,300 fpm	15,270 fpm	15,000 fpm	16,000 fpm
Blade Tip Speed 1,000 RPM	–	–	16,000 fpm	
Material Flow System	partially baffled deck	partially baffled deck	fully baffled deck	
Stump Jumper Type	standard bolt-on	standard bolt-on	standard round-welded	
Wing Flex Up/Down	90° up, 22° down			
Suspension	spring on center section	spring on cylinder	spring on cylinder	spring on cylinder / walking tandem spring arms
Wheel Type	15" rims, 21" laminated, used aircraft tires or 24" foam-filled aircraft tires			
Wing Leveling Adjustment	easy adjust turnbuckle			
Cutting Area Shielding	chain shielding standard	rubber belting or chain	rubber belting, single or double chain	
Gearbox Warranty (limited)	6-year			
Deck Rust-Through Warranty	–	–	10-year	
	Compact/utility-duty		Standard-duty	Heavy-duty

BW1800X / BW1260X	BW240	BW240HD	BW2400X	BW1620X
65–250 hp	70–200 hp	70–300 hp	70–300 hp	
	13.25"		12.5"	
180" / 126"	240"			162"
	2"–15"			
4"	2" / 3"		4"	
self-leveling swivel clevis; optional pintel ring		standard self-leveling swivel clevis; optional pintel ring		
96" / 93"	123"			100"
190" / 136"	250"			171"
205" / 205"	198"			
	smooth, sloped		smooth, sloped double-deck	
.179"	.135"		.135" / .135" upper/lower	
	.25"			
	1" full length			
5,300 / 5,100 lbs	6,510 lbs	6,600 lbs	7,740 lbs	8,500 lbs
1,790 / 1,860 lbs	2,400 lbs		2,700 lbs	2,870 lbs
	Cat 6 CV or Cat 5 heavy 3 joint			
	2"	2.38"	2.38"	
235 / 205 hp	235 (120) hp	235 (190) hp	250 / 210 hp	
.5" x 4" quick change blade pins, hi-lift, flat or shredder				.5" x 4" quick change blade pins, hi-lift, flat
	6"			
16,000 fpm	15,450 fpm		15,450 fpm	
16,000 fpm	16,300 fpm		16,650 fpm	
fully baffled deck	standard baffles			
standard round-welded	standard round-welded			
	90° up, 22° down			left or right wing – 90° up, 22° down
rigid spring arms or walking tandem spring arms	standard spring suspension or optional tandem spring arms			
	15" rims, 21" laminated, 24" or 29" used aircraft tires or foam-filled aircraft tires			
	easy adjust turnbuckle			
single or double chain	rubber belting or single or double chain			
	6-year			
	10-year			
Extreme-duty	Standard-duty	Heavy-duty	Extreme-duty	



WOODS® | A Blount International Brand
2606 South Illinois Route 2, Oregon, Illinois 61061 tel 800-319-6637 woodsequipment.com

Warning! Some images may show safety shields removed to provide a better view. Equipment should never be operated with any safety shield removed. Some machines in this brochure may be shown with optional equipment. Always operate machines in accordance with supplied operator's manuals. ©2014 Woods Equipment Company. All rights reserved. WOODS and Woods logo are trademarks of Woods Equipment Company. All other trademarks, trade names, or service marks not owned by Woods Equipment Company that appear in this brochure are the property of their respective companies or mark holders. Specifications subject to change without notice.